

**DESCRIPTION**


The UCAN Hook Wedge Anchor is a high grade steel fastener, designed primarily for wire mesh installation. The anchor consists of a steel body with 1" hooked end and a one piece three segment wrap around expansion clip.

**FEATURES**

- Wrap around expansion clip provides true 360° expansion
- Non-bottom bearing type
- Fast, simple installation by hammer
- Anchor has follow-up expansion feature
- Rigid, one piece fastening
- Zinc Plated

**LIMITATIONS**

Not recommended for uncured concrete (less than 7 days of curing).

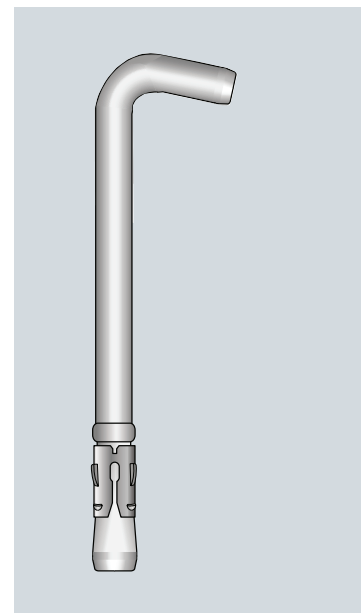

**MATERIAL SPECIFICATIONS**

**Anchor body**

- Grade AISI C1035
  - Minimum tensile strength - 84,000 psi
  - Average yield strength - 56,000 psi

**Clip**

- Cold rolled steel, AISI C1010 - C118

**Corrosion protection**


- The anchor body and expansion clip are zinc plated.

**TECHNICAL DATA**

Drilled Hole Diameter	3/8"
Embedment	3-1/2"
Ultimate Tension Load In 5,000 psi Concrete	1,950 lbs
	8.70 kN
Ultimate Shear Load In 2,000 psi Concrete	2,580 lbs
	11.50 kN

Note: Load data is provided as a guide only.

**INSTALLATION**

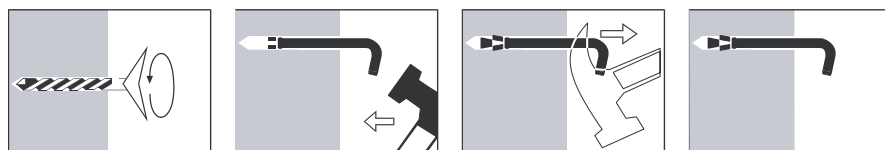

**NOTE:**  
 Apply Safety Factor to ensure the working load per anchor does not exceed 1/4 of the tabulated ultimate load, under static loading conditions.